

Power Protection for Wide Format Printers



PULSAR series power protection kits include a rebuilt true Online UPS, Surge Suppression Module, and Power Management Monitor.

PULSAR units keep you printing by protecting your equipment from:

Power Outages
Transient Surges
Voltage Sags
Voltage Swells
StartUp Surges
Frequency Variations
& Line Noise

PULSAR series kits are available in a wide range of sizes.

Pulsar 213S - features a true online 3kva APC UPS with a maximum capacity of 13 amps at 220volts and built-in surge suppression module.

Pulsar 222S - features a true online 6kva APC UPS with a maximum capacity of 22 amps at 220volts and a built-in surge suppression module.

Pulsar 270 - features a true online GE 10kva UPS with a maximum capacity of 70 amps at 220volts with built-in surge suppression.

Pulsar Custom - custom-designed system to meet your power needs.

All systems include at least 30 minutes of runtime for basic print operations and easy-to-use power monitoring software.



Pulsar 213S/222S same size. Pulsar 270 is larger

RECOMMENDED PULSAR kit for Signsfy Equipment

213S

Artemisa T2100
ECOTec 180
ECOTec 320
Galaxy 180/190
Galaxy 320
Galaxy UV
Triton S 160
Triton S 320
Triton X 320
XL Laser

222S

Thor 2513 Eco Router

270

Galaxy Apollo UV

Assumes protection for core printer and computer functions. Heaters and fans do not need protection.


Pulsar 213S & 222S Rear

features:
(2) C19 Outlets



PULSAR S SURGE:

UL Listed ANSI/UL 1449 3rd ed. surge protection device mounted on panel with green power light.

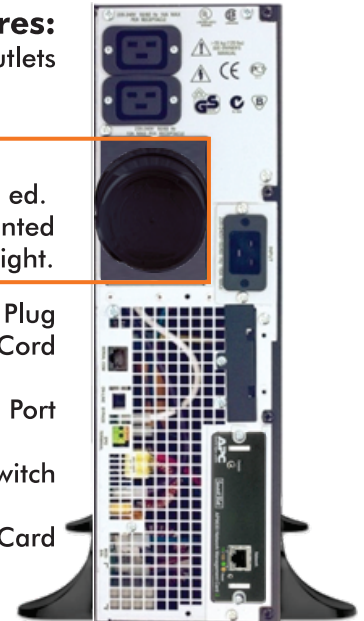

L630P Input Plug and Cord

Extended Run Port

Bypass Switch

Web Management Card

GENERAL SPECIFICATIONS

subject to change, based on availability

Pulsar 213S

Pulsar 222S

Pulsar 270

| | | | |
|------------------------|--------------------------------|-------------------------|----------------------|
| Inrush Peak Amperage | 13.0A | 22.0A | 70.0A for 60sec |
| Sustained Max Amperage | 13.0A | 22.0A | 42.0A |
| Input Voltage Range | 160-280volt | | 162-285volt |
| Output Voltage | 208/230/240V | | 120/208/220/230/240V |
| Nominal KVA | 3.0kva | 6.0kva | 10.0kva |
| UPS Topology | Online Double Conversion | | |
| Voltage Waveform | True Sine Wave | | |
| Battery Type | Sealed lead acid (VRLA) | | |
| Battery Capacity | 960vah | | 2880vah |
| Runtime | 45min @ 4 amps | | 40min @ 10 amps |
| Dimensions (DxWxH) | 26" x 5.1" x 17" | | 28.7" x 12" x 39.2" |
| Weight | 120 lbs | | 386 lbs |
| Output Receptacles | (2) IEC320-C19 | | Custom |
| Input Power Cord | 6' cord with L620P plug | 6' cord with L630P plug | Hardwired |
| Interfaces | RJ45 jack for power management | | |
| Warranty | 15 months | | |

DocId: S03

CUSTOM PULSAR SOLUTIONS

Need more runtime? Want to protect other printers or equipment?
Then contact your Signsfy Representative to get a custom quote.